

5. Troubleshooting

Check the basic checkpoints first to determine whether it is machine trouble or a problem in the operation method. When it is not related to the basic checkpoints, perform checking in accordance with the procedures of troubleshooting by symptom.

5-1 Basic Checkpoints for Troubleshooting

- 1) Is the voltage of the power source appropriate ?
 - (1) It should be within the rating voltage $\pm 10\%$ range.
 - (2) The air conditioner may not operate properly when the voltage is out of this range.
- 2) Is the connection with the fan motor, compressor wire, and starting condenser appropriately made ?
- 3) The symptoms listed in the table below are not indicative of machine trouble.

Symptom	Cause and check
No operation	• Check whether there is power failure or the power plug is pulled out. • Check whether the unit is stopped as a result of completion of the sleep time. • Pull out the power plug for ten seconds, and then insert it again.
Air flows, but no cooling	• Check whether the Air filter is clogged with dust or is dirty. • Check whether the desired temperature is too high. Set the desired temperature to a lower level than the current temperature. • Check whether it is in "FAN" mode.
The remocon does not operate	• Check whether battery is completely depleted. • Check whether the battery is properly inserted. • Check whether the receiving window of the remocon for the assembly main PCB is blinded. • Check whether the remocon is affected by jamming due to a neon sign.
No temperature setting	• Check whether the unit is in "FAN" mode. (In "FAN" mode, only the current temperature is displayed, and the desired temperature is not set.)

✳ Checking and Display of Fault Area


ERROR OPERATION	ERROR OPERATION
ROOM THERMISTOR (OPEN OR SHORT)	E1 displayed

5-2 Troubleshooting by Symptom

5-2-1 No power

1) Check points


- (1) Is the voltage of the power source normal ? (the rating voltage $\pm 10\%$ range.)
- (2) Is the electric wire in good contact ?(CN 71, RY 71)
- (3) Is the output voltage of the IC01(KA 7812) normal ?(DC 11.5V ~ DC 12.5V)
- (4) Is the output voltage of the IC02(KA 7805) normal ?(DC 4.5V ~ DC 5.5V)

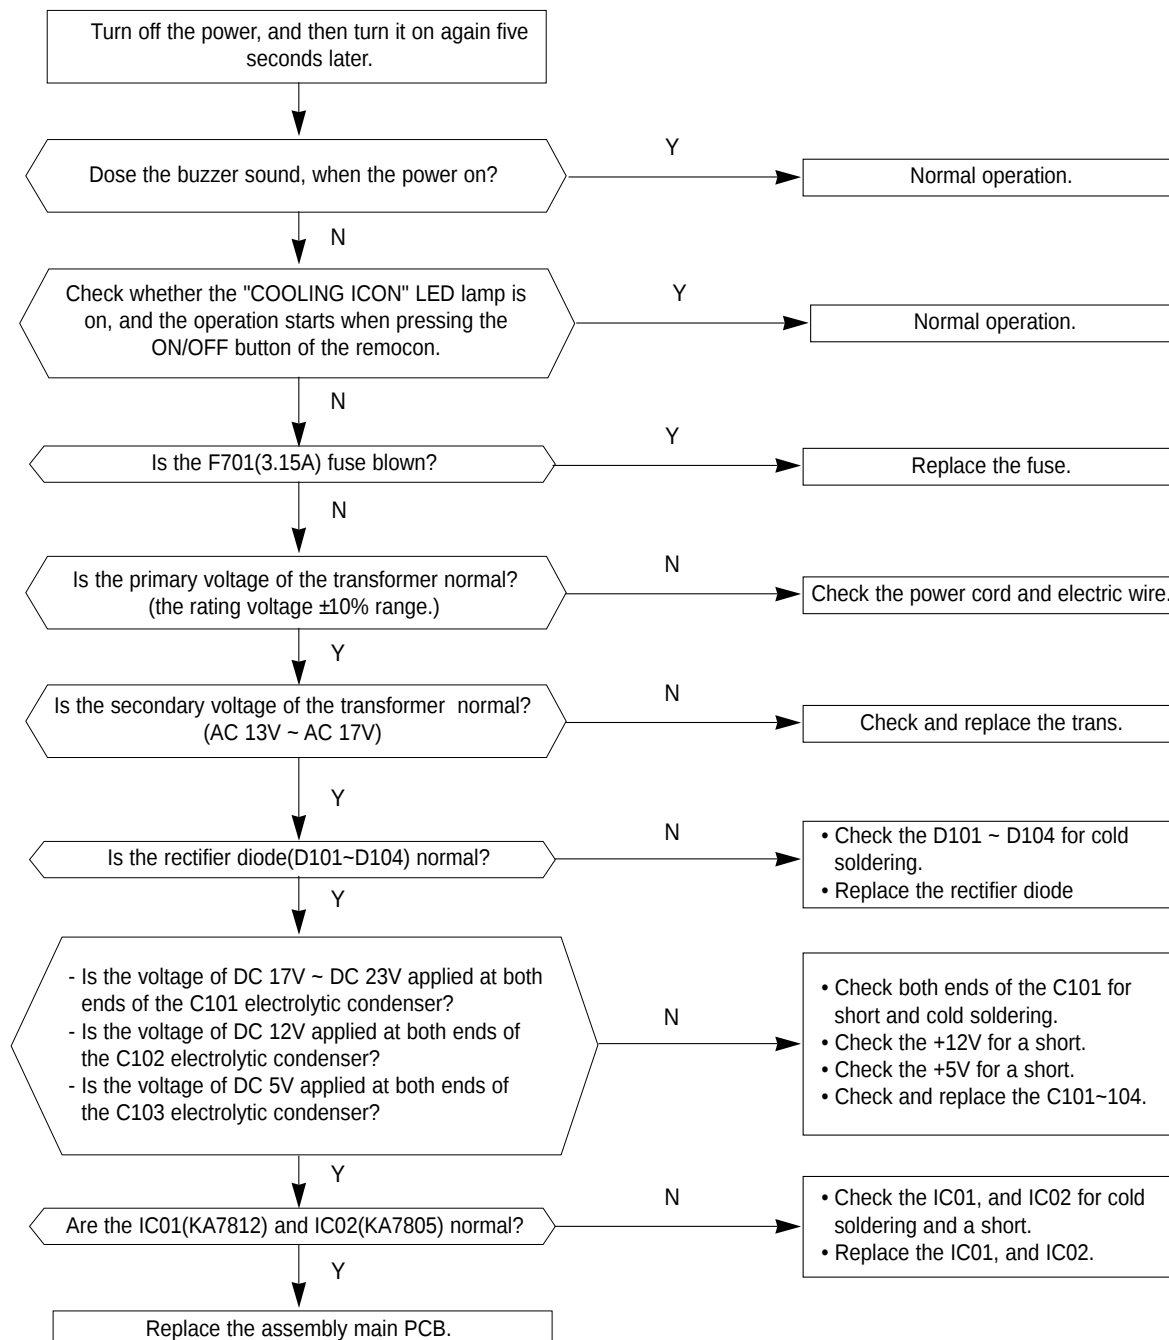

5-2-2 When the Membrane Key pad and Led Display

1) Check points


- (1) Is the voltage of the power source normal ? (the rating voltage $\pm 10\%$ range.)
- (2) Is the electric wire in good contact ?(CN71, RY71)
- (3) Is the connection of the assembly main PCB, and MEMBRANE KEY PAD in good contact? (CN91)

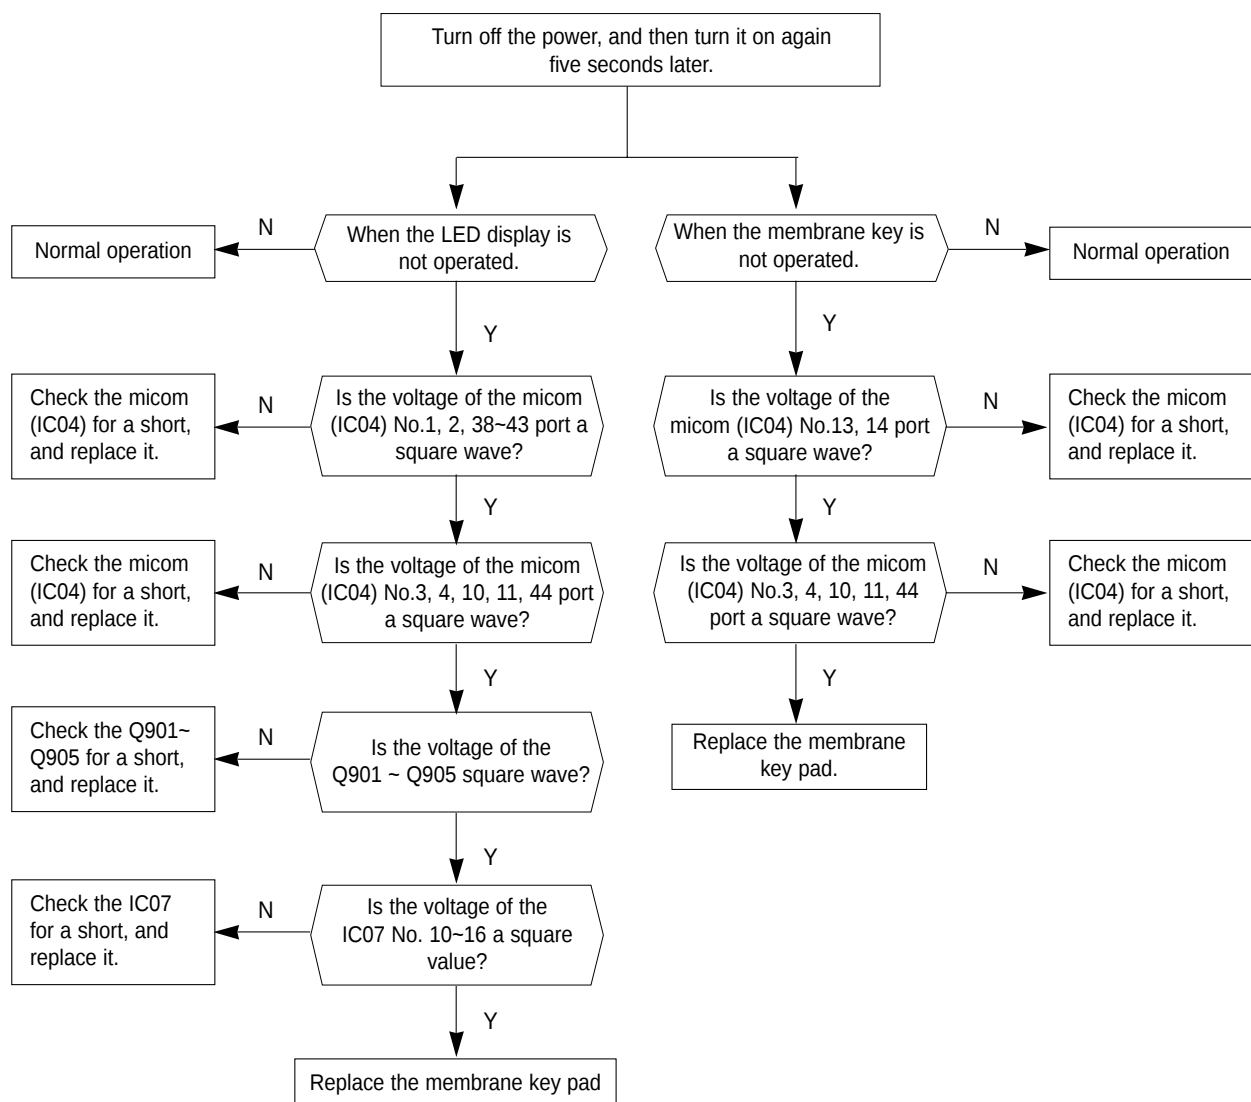

5-2-3 When the remocon is not operated

1) Check points


- (1) Is the voltage of the power source normal ? (the rating voltage $\pm 10\%$ range.)
- (2) Is the electric wire in good contact ? (CN71, RY71)
- (3) Is the assembly main PCB in good contact with the MEMBRANE KEY PAD(CN91)
- (4) Is the battery voltage of the remocon above DC 2.7V?

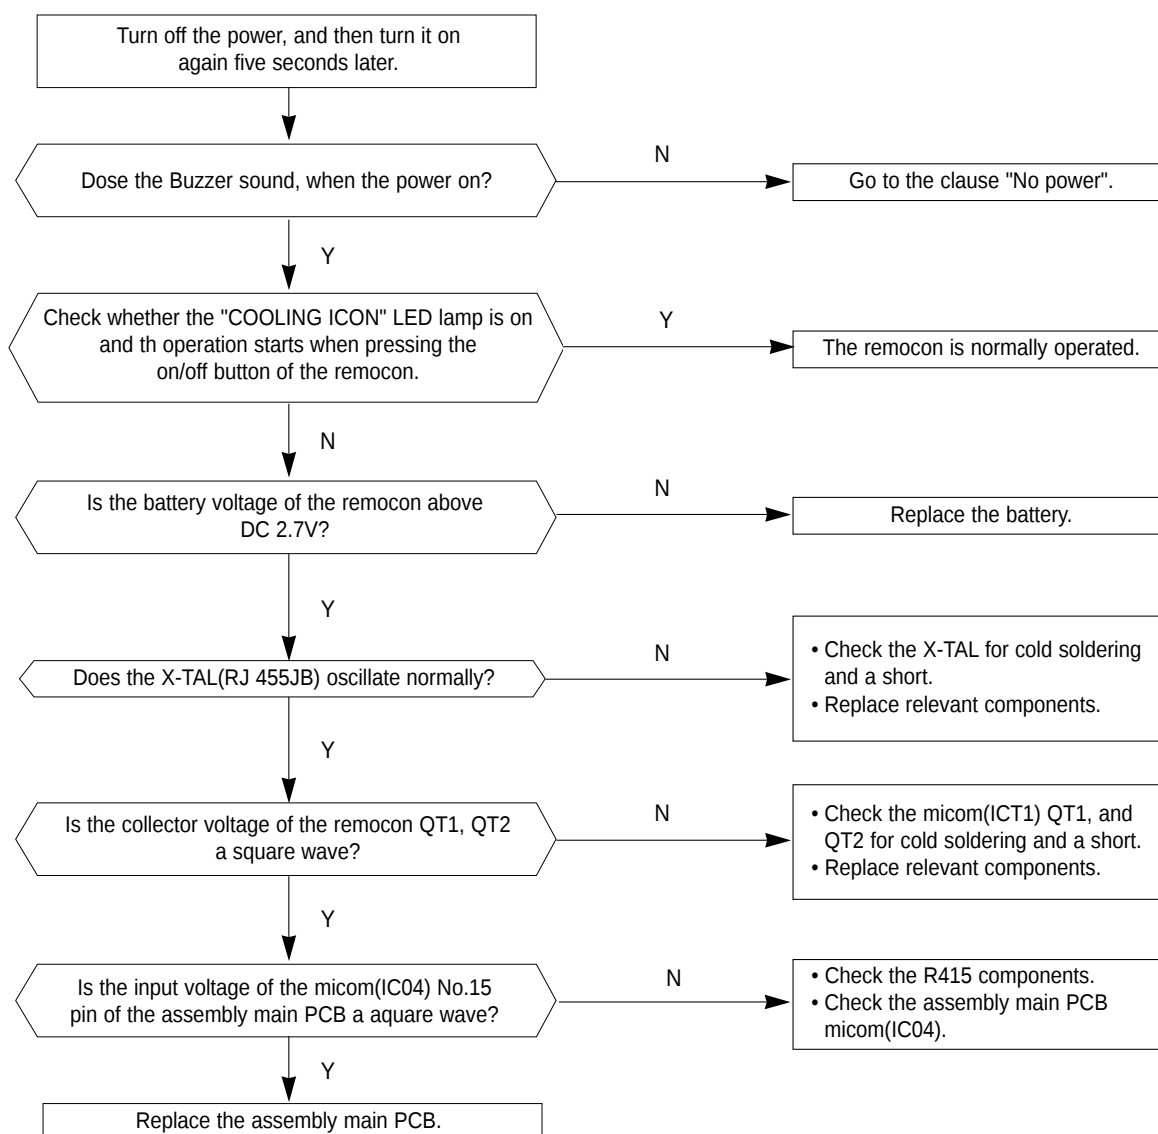

5-2-4 When the compressor is not operated

1) Check points


- (1) Is the voltage of the power source normal ? (the rating voltage $\pm 10\%$ range.)
- (2) Is the desired temperature lower than the indoor temperature in the "COOL" mode?
(Compressor stopped)
- (3) Is the starting condenser in good contact?
- (4) Is the electric wire in good contact ? (CN71, RY71)
- (5) Is the output voltage of the IC01(KA7812) and IC02(KA7805) normal ?

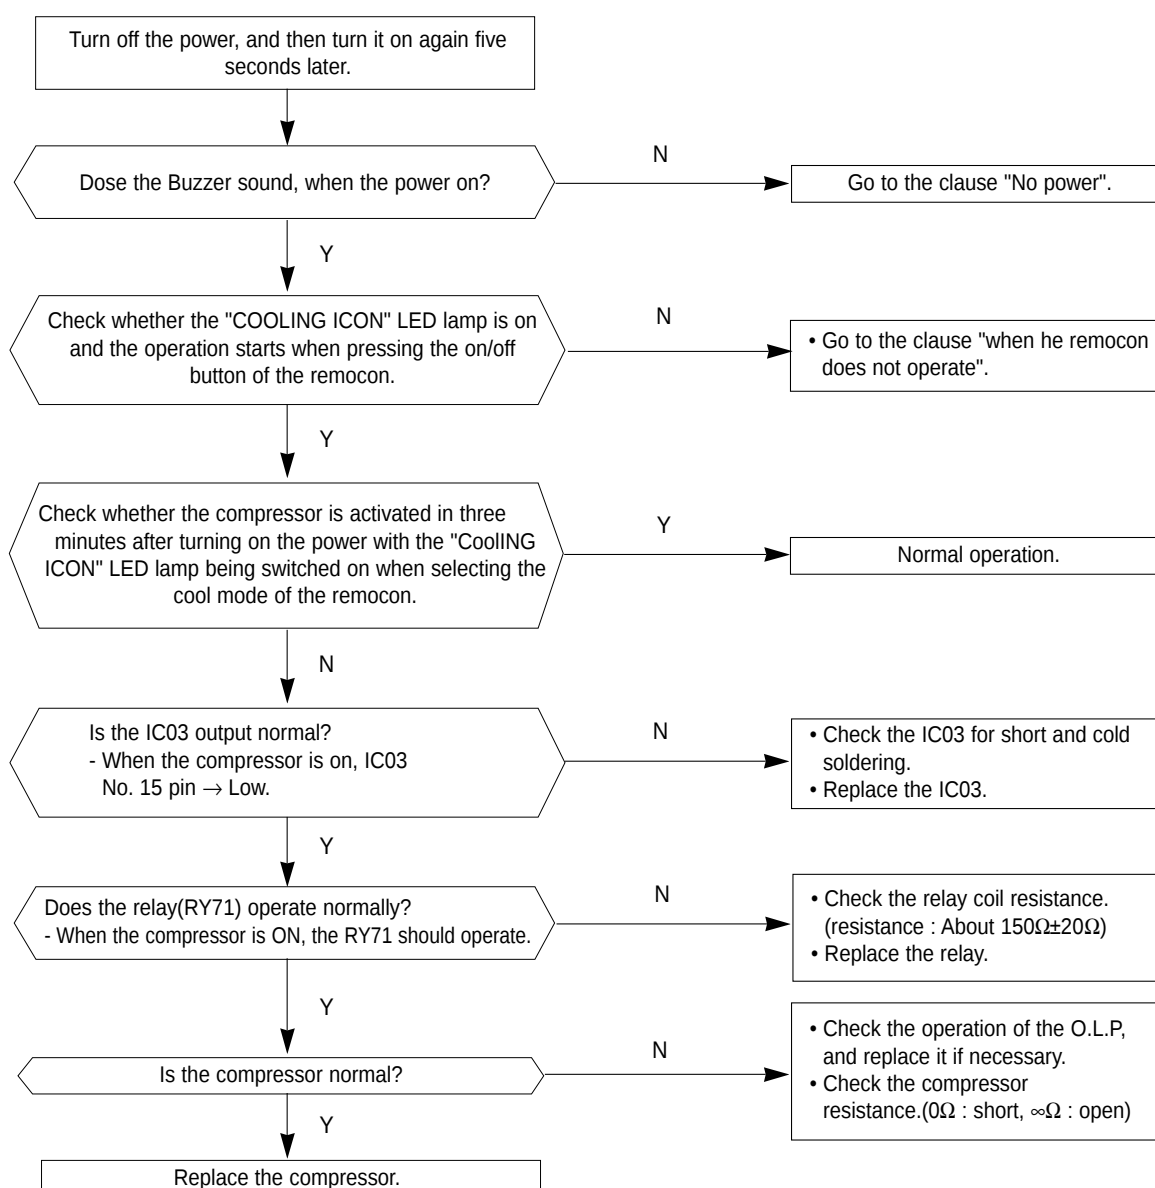

5-2-5 When the air swing motor is not operated

1) Check points


- (1) Is the voltage of the power source normal ? (the rating voltage $\pm 10\%$ range.)
- (2) Is the electric wire in good contact ?(CN71, RY71)
- (3) Is the swing motor connector in good contact?(CN71)
- (4) Is the terminal connected to the swing motor in good contact?
- (5) Is the output voltage of the IC01(KA7812) and IC02(KA7805) normal?

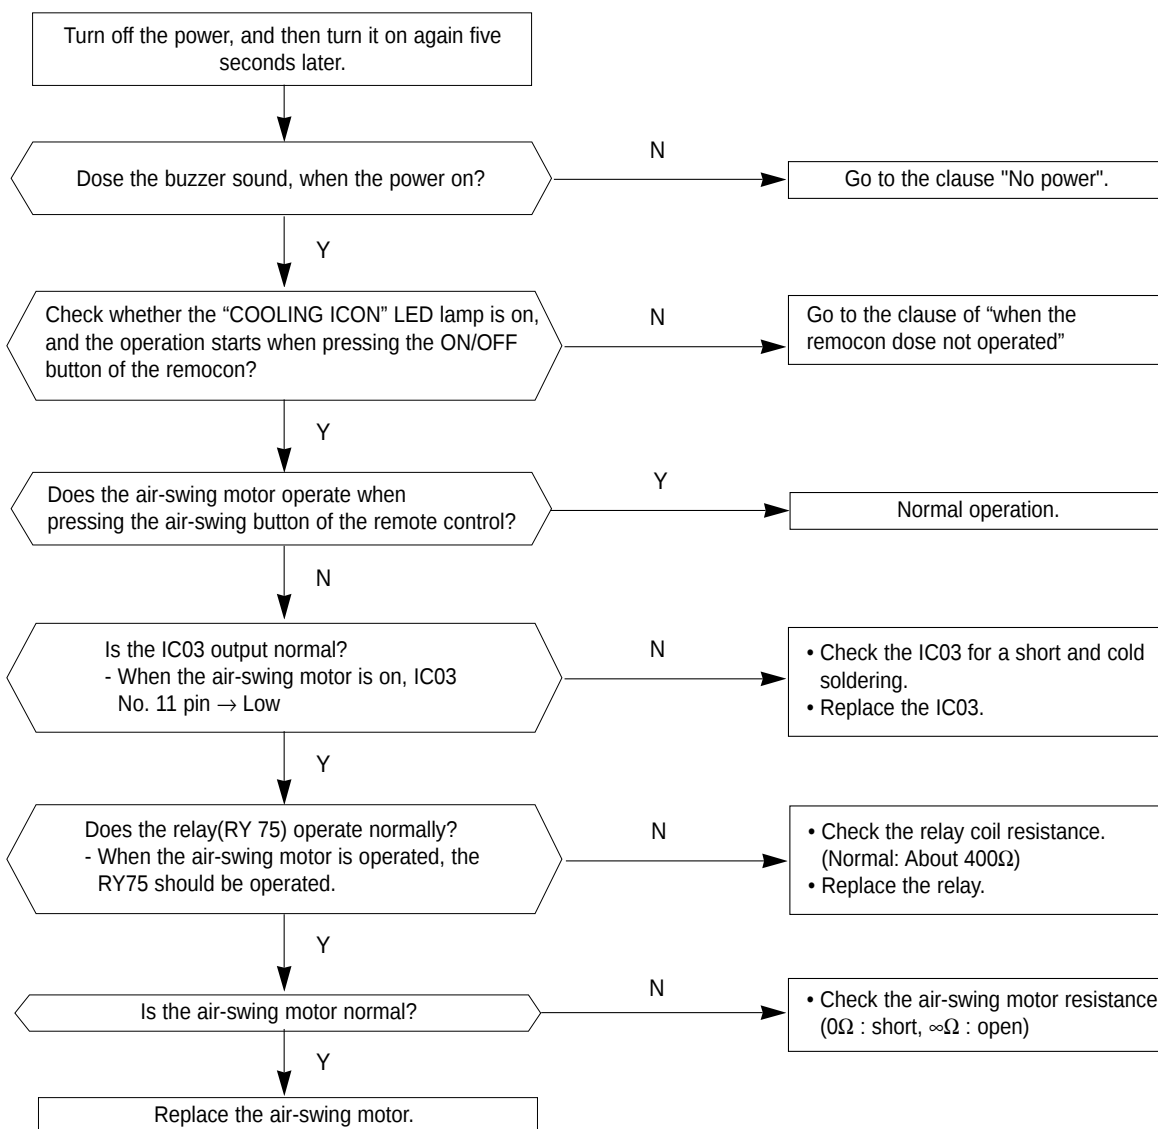

5-2-6 When the fan motor does not operated

1) Check points

- (1) Is the voltage of the power source normal ? (the rating voltage $\pm 10\%$ range.)
- (2) Is the electric wire in good contact ?(CN71, RY71)
- (3) Is the starting condenser(FAN MOTOR) in good contact?
- (4) Is the fan motor connector in good contact?(CN73)
- (5) Is the output voltage of the IC01(KA7812) and IC02(KA7805) normal ?

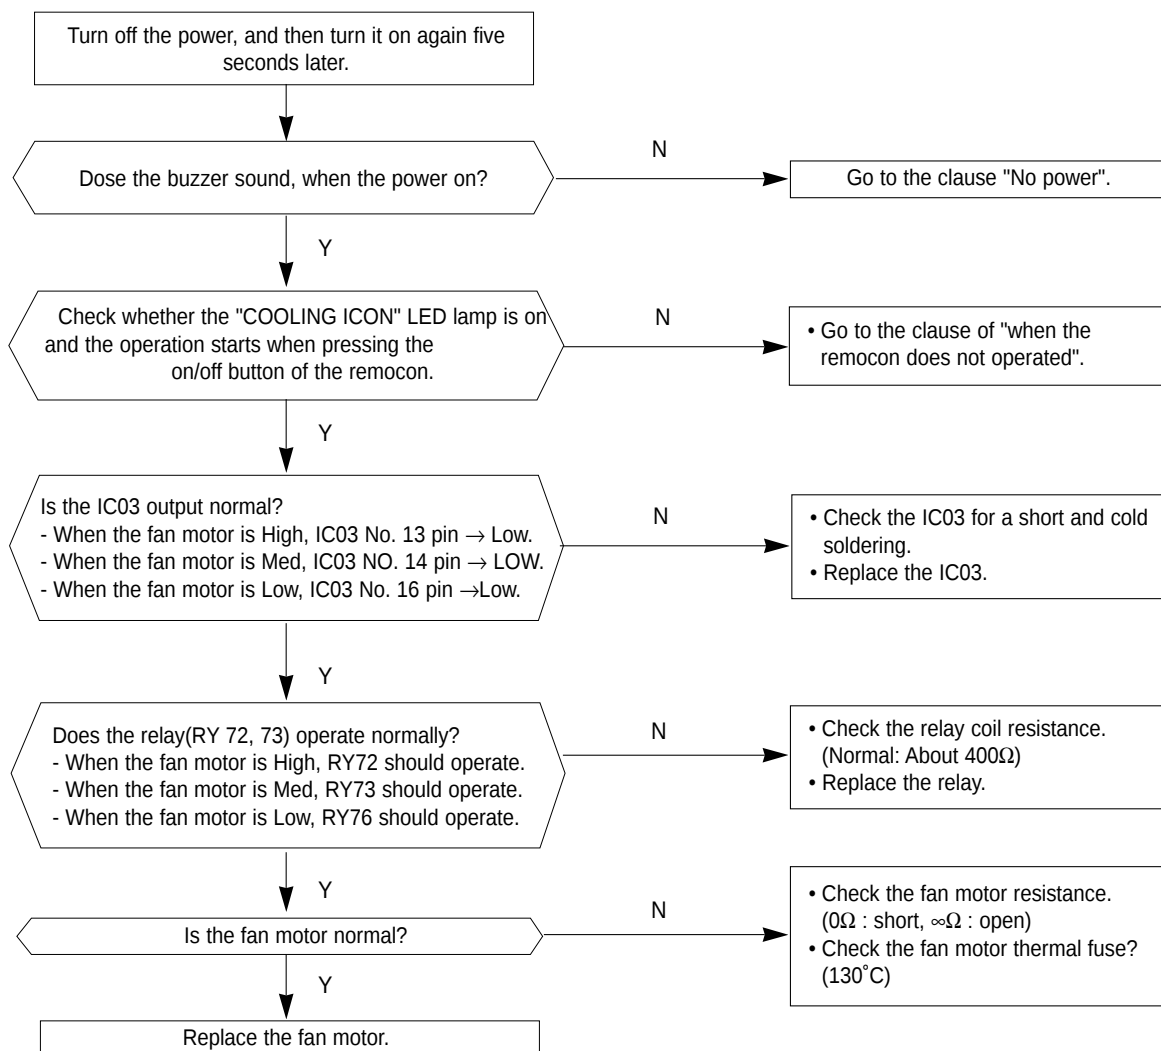

MEMO